



KABELOVÉ KOMORY INTEGRAL


MODEL 1220 - 6 INTEGRAL
MODEL 1220 - 12 INTEGRAL
MODEL 1220 - 18 INTEGRAL

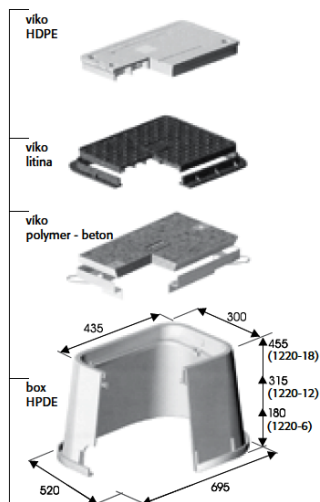

MODEL 1324 - 15 INTEGRAL
MODEL 1324 - 18 INTEGRAL

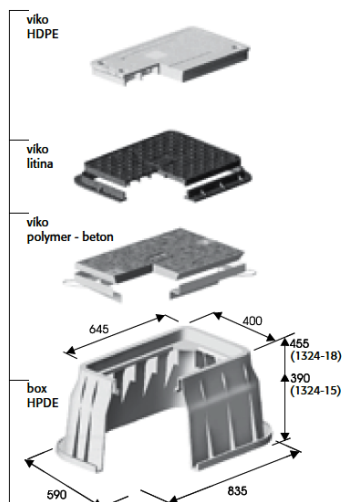

MODEL 1419 - 6 INTEGRAL
MODEL 1410 - 12 INTEGRAL
MODEL 1419 - 18 INTEGRAL

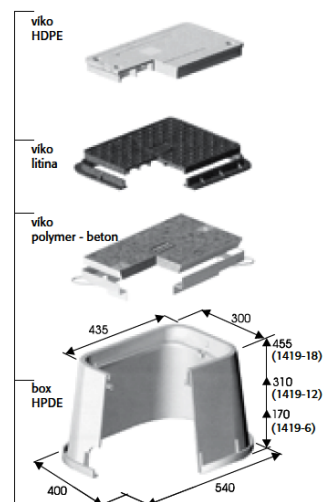

TYPE 1220 range

PRODUCT DETAILS

Product Code	Product Type	Inside Dimensions (mm)				Outside Dimensions (mm)				Depth (mm)	Weight (kg)	Qty per pallet	Available AX-S™ covers		
		L	W	X	Y	A	B	E	F				HDPE	Concrete	Ductile Iron
1220-12	Box	505	340	610	430	545	380	660	480	315	4.2kg	44	Yes	Yes	Yes
1220-18	Box	505	340	645	475	545	380	695	525	445	6.37kg	40	Yes	Yes	Yes
1220-6	Base Extension	510	340	570	400	545	380	610	440	180	2.4kg	28	Yes	Yes	Yes



1220-12
shown with HDPE cover



1220-18
shown with HDPE cover



1220-6
shown with HDPE cover

SERIES PROFILE

Material

Nitrogen Foamed High Density Polyethylene


Vertical Loading

Meets the vertical loading capabilities of EN124: A15. Suitable for installation in EN124: B125 environments in accordance with CUBIS' installation guidelines. Contact sales for more information.

Options & Accessories

Can be supplied with:

- Base & Grates
- Artificial grass covers
- Duct Entries
- Other frame and cover types




All measurements supplied in millimetres

ORDERING

For product codes, configuration and ordering, please contact our sales office.

VARIATIONS

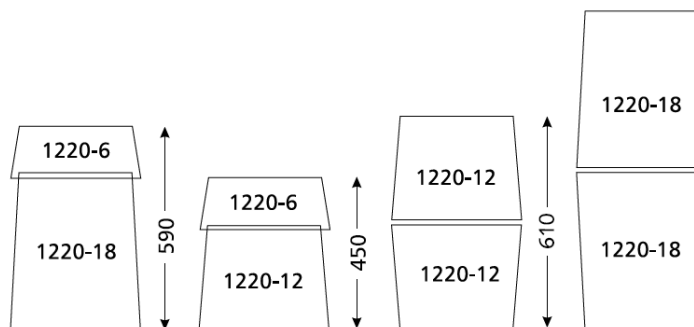

DAT 0801	
V1.1	18/2/2013

TYPE 1324 range

PRODUCT DETAILS


Product Code	Product Type	Inside Dimensions (mm)				Outside Dimensions (mm)				Depth (mm)	Weight (kg)	Qty per pallet	Available AX-S™ covers		
		L	W	X	Y	A	B	E	F				HDPE	Concrete	Ductile Iron
1324-15	Box	600	355	760	575	645	400	835	590	390	8.4kg	10	Yes	Yes	Yes
1324-18	Box	565	325	790	540	630	390	860	620	455	13.3kg	10	Yes	Yes	Yes
1324-8	Base Extension	790	540	790	540	860	620	860	260	205	4.3kg	32	Yes	Yes	Yes



1324-15
shown with HDPE cover



1324-18
shown with HDPE cover



1324-8
shown with HDPE cover

SERIES PROFILE

Material

Nitrogen Foamed High Density Polyethylene


Vertical Loading

Meets the vertical loading capabilities of EN124: A15. Suitable for installation in EN124: B125 environments in accordance with CUBIS' installation guidelines. Contact sales for more information.

Options & Accessories

Can be supplied with:

- Base & Grates
- Artificial grass covers
- Duct Entries
- Other frame and cover types




All measurements supplied in millimetres

ORDERING

For product codes, configuration and ordering, please contact our sales office.

VARIATIONS

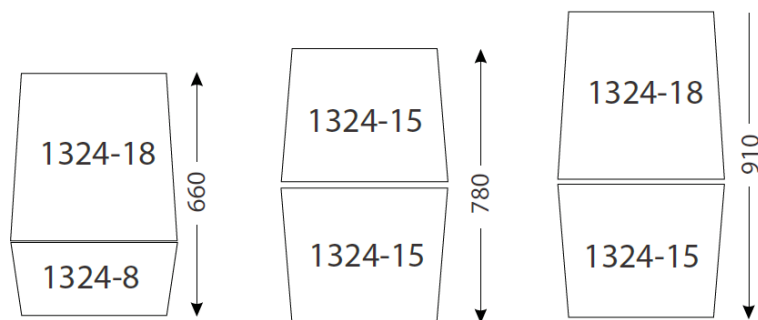

DAT 0802	
V1.1	18/2/2013

TYPE 1419 range

PRODUCT DETAILS

Product Code	Product Type	Inside Dimensions (mm)				Outside Dimensions (mm)				Depth (mm)	Weight (kg)	Qty per pallet	Available AX-S™ covers		
		L	W	X	Y	A	B	E	F				HDPE	Concrete	Ductile Iron
1419-6	Box	395	265	435	305	430	300	480	350	170	1.6kg	36	Yes	Yes	Yes
1419-12	Box	395	265	500	360	435	300	540	400	310	3.5kg	66	Yes	Yes	Yes
1419-18	Box	390	255	560	430	435	300	595	460	455			Yes	Yes	Yes



1419-6
shown with HDPE cover



1419-12
shown with HDPE cover



1419-18
shown with artificial grass cover

SERIES PROFILE

Material

Nitrogen Foamed High Density Polyethylene


Vertical Loading

Meets the vertical loading capabilities of EN124: A15. Suitable for installation in EN124: B125 environments in accordance with CUBIS' installation guidelines. Contact sales for more information.

Options & Accessories

Can be supplied with:

- Base & Grates
- Artificial grass covers
- Duct Entries
- Other frame and cover types



All measurements supplied in millimetres

ORDERING

For product codes, configuration and ordering, please contact our sales office.

VARIATIONS

No variations

DAT 0803	
V1.1	18/2/2013

TYPE 1730 range

PRODUCT DETAILS

Product Code	Product Type	Inside Dimensions (mm)				Outside Dimensions (mm)				Depth (mm)	Weight (kg)	Qty per pallet	Available AX-S™ covers		
		L	W	X	Y	A	B	E	F				HDPE	Concrete	Ductile Iron
1730-18B	Box	780	450	955	625	825	495	1030	695	465	13.2kg	8	Yes	Yes	Yes



1730-18B
shown with HDPE cover

SERIES PROFILE

Material

Nitrogen Foamed High Density Polyethylene


Vertical Loading

Meets the vertical loading capabilities of EN124: A15. Suitable for installation in EN124: B125 environments in accordance with CUBIS' installation guidelines. Contact sales for more information.

Options & Accessories

Can be supplied with:

- Base & Grates
- Artificial grass covers
- Duct Entries
- Other frame and cover types




All measurements supplied in millimetres

ORDERING

For product codes, configuration and ordering, please contact our sales office.

VARIATIONS



DAT 0804		
V1.1	18/2/2013	

VÁLCOVÉ KOMORY

Typ komory	<u>HORNÍ ROZMĚRY</u>		<u>DOLNÍ ROZMĚRY</u>		<u>HLOUBKA</u>
	Vrchní vnitřní rozměr	Vrchní vnější rozměr	Dolní vnitřní rozměr	Dolní vnější rozměr	
708	Ø 150	Ø 160	Ø 195	Ø 205	230
910	Ø 240	Ø 250	Ø 300	Ø 335	265

